

5<sup>th</sup> Draft **Standard** ECMA-XXX

1<sup>st</sup> Edition / July 2013

## The JSON Data Interchange Format

# Standard



**COPYRIGHT PROTECTED DOCUMENT**

## Contents

Page

<b>1</b>	<b>Scope</b> .....	<b>2</b>
<b>2</b>	<b>Conformance</b> .....	<b>2</b>
<b>3</b>	<b>Normative references</b> .....	<b>2</b>
<b>4</b>	<b>Bibliography</b> .....	<b>2</b>
<b>5</b>	<b>JSON Text</b> .....	<b>2</b>
<b>6</b>	<b>JSON Values</b> .....	<b>3</b>
<b>7</b>	<b>Objects</b> .....	<b>3</b>
<b>8</b>	<b>Arrays</b> .....	<b>3</b>
<b>9</b>	<b>Numbers</b> .....	<b>4</b>
<b>10</b>	<b>String</b> .....	<b>4</b>
	<b>Annex A (normative) JSON Value Grammar</b> .....	<b>7</b>
	<b>Annex B (normative) JSON Object Grammar</b> .....	<b>8</b>
	<b>Annex C (normative) JSON Array Grammar</b> .....	<b>9</b>
	<b>Annex D (normative) JSON Number Grammar</b> .....	<b>10</b>
	<b>Annex E (normative) JSON String Grammar</b> .....	<b>12</b>

## Introduction

JSON is a text format that facilitates structured data interchange between all programming languages. JSON is a syntax of braces, brackets, colons, and commas that is useful in many contexts, profiles, and applications. JSON was inspired by the object literals of JavaScript aka ECMAScript as defined in the **ECMAScript Programming Language Standard, Third Edition**. It does not attempt to impose ECMAScript's internal data representations on other programming languages. Instead, it shares a small subset of ECMAScript's textual representations with all other programming languages.

JSON is agnostic about numbers. In any programming language, there can be a variety of number types of various capacities and complements, fixed or floating, binary or decimal. That can make interchange between different programming languages difficult. JSON instead offers only the representation of numbers that humans use: a sequence of digits. All programming languages know how to make sense of digit sequences even if they disagree on internal representations. That is enough to allow interchange.

Programming languages vary widely on whether they support objects, and if so, what characteristics and constraints the objects offer. The models of object systems can be wildly divergent and are continuing to evolve. JSON instead provides a simple notation for expressing collections of name/value pairs. Most programming languages will have some feature for representing such collections, which can go by names like `record`, `struct`, `dict`, `map`, `hash`, or `object`.

JSON also provides support for ordered lists of values. All programming languages will have some feature for representing such lists, which can go by names like `array`, `vector`, or `list`. Because objects and arrays can nest, trees and other complex data structures can be represented. By accepting JSON's simple convention, complex data structures can be easily interchanged between incompatible programming languages.

JSON does not support cyclic graphs, at least not directly. JSON is not indicated for applications requiring binary data.

It is expected that other standards will refer to this one, strictly adhering to the JSON text format, while imposing restrictions on various encoding details. Such standards may require specific behaviours. JSON itself specifies no behaviour.

Because it is so simple, it is not expected that the JSON grammar will ever change. This gives JSON, as a foundational notation, tremendous stability. JSON was first presented to the world at the [JSON.org](http://JSON.org) website in 2001. JSON stands for JavaScript Object Notation.



This Ecma Standard has been adopted by the General Assembly of <month> <year>.

**"COPYRIGHT NOTICE**

© 2013 Ecma International

*This document may be copied, published and distributed to others, and certain derivative works of it may be prepared, copied, published, and distributed, in whole or in part, provided that the above copyright notice and this Copyright License and Disclaimer are included on all such copies and derivative works. The only derivative works that are permissible under this Copyright License and Disclaimer are:*

- (i) works which incorporate all or portion of this document for the purpose of providing commentary or explanation (such as an annotated version of the document),*
- (ii) works which incorporate all or portion of this document for the purpose of incorporating features that provide accessibility,*
- (iii) translations of this document into languages other than English and into different formats and*
- (iv) works by making use of this specification in standard conformant products by implementing (e.g. by copy and paste wholly or partly) the functionality therein.*

*However, the content of this document itself may not be modified in any way, including by removing the copyright notice or references to Ecma International, except as required to translate it into languages other than English or into a different format.*

*The official version of an Ecma International document is the English language version on the Ecma International website. In the event of discrepancies between a translated version and the official version, the official version shall govern.*

*The limited permissions granted above are perpetual and will not be revoked by Ecma International or its successors or assigns.*

*This document and the information contained herein is provided on an "AS IS" basis and ECMA INTERNATIONAL DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE."*



# The JSON Data Interchange Format

## 1 Scope

JSON is a lightweight, text-based, language-independent data interchange format. It was derived from the ECMAScript Programming Language Standard, but is programming language independent. JSON defines a small set of formatting rules for the portable representation of structured data.

## 2 Conformance

A conforming JSON generator or encoder will produce texts that strictly conform to the JSON grammar.

## 3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 10646, *Information Technology – Universal Coded Character Set (UCS)*

## 4 Bibliography

ECMA-262, *The ECMAScript Programming Language*, 3<sup>rd</sup> edition (December 1999).

## 5 JSON Text

A JSON text is a sequence of Unicode codepoints that conforms to the JSON Value Grammar. The set of tokens includes six structural characters, strings, numbers, and three literal names.

The six structural characters:

{ } [ ] : ,

Insignificant whitespace is allowed before or after any of the six structural characters.

There are three literal names:

true

false

null

## 6 JSON Values

A JSON value can be an object, array, number, string, true, false, or null.

### *value*

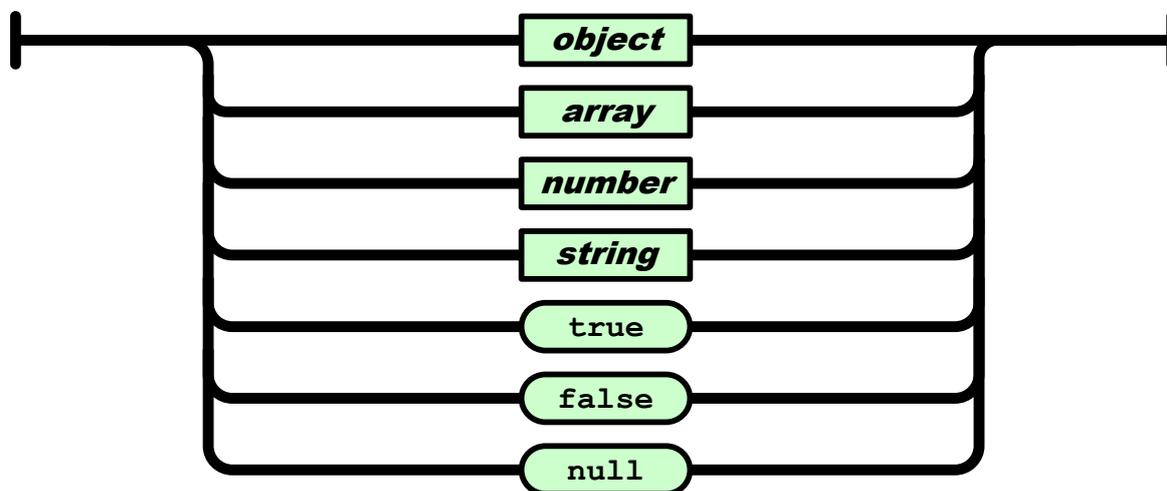


Figure 1 — value

## 7 Objects

An object structure is represented as a pair of curly brackets surrounding zero or more name/value pairs. A name is a string. A single colon comes after each name, separating the name from the value. A single comma separates a value from a following name.

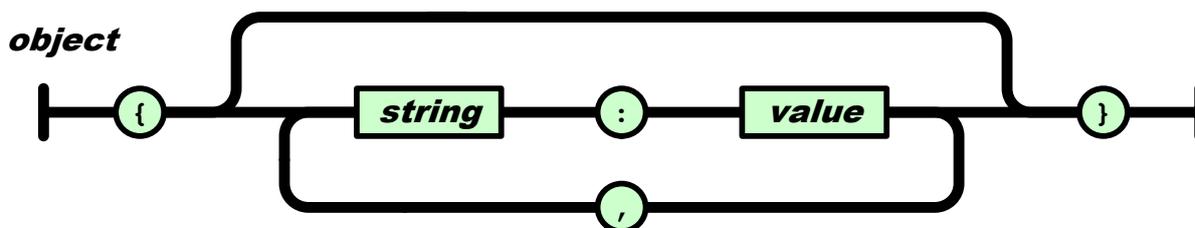


Figure 2 — object

## 8 Arrays

An array structure is represented as square brackets surrounding zero or more values. The values are separated by commas. The order of the values is significant.

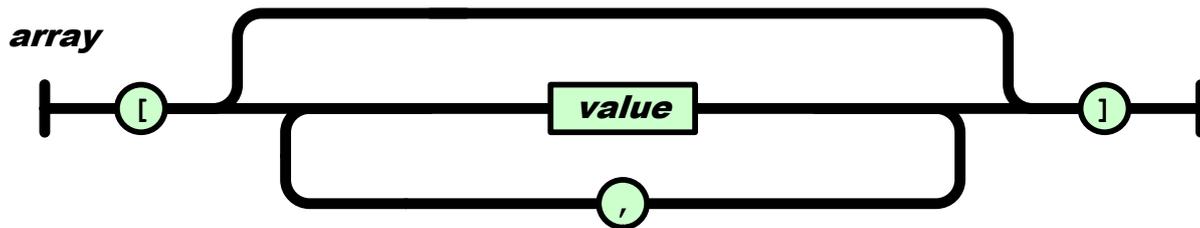


Figure 3 — array

## 9 Numbers

A number is represented in base 10 with no superfluous leading zero. It may have a preceding minus sign. It may have a .-prefixed fractional part. It may have an exponent of ten, prefixed by e or E and optionally + or -.

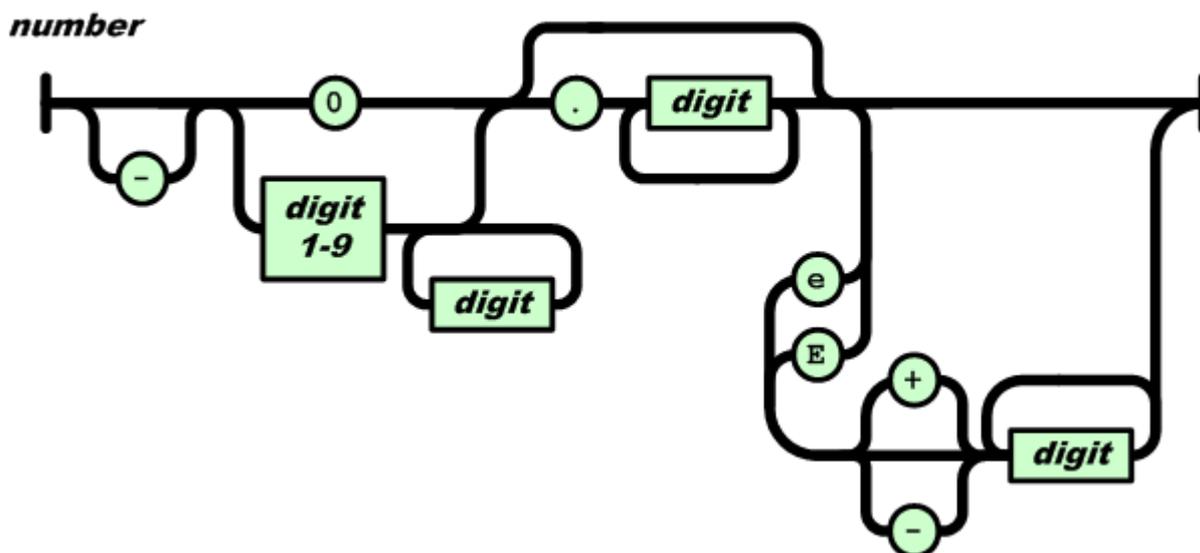


Figure 4 — number

Numeric values that cannot be represented as sequences of digits (such as *Infinity* and *NaN*) are not permitted.

## 10 String

The representation of strings is similar to conventions used in the C family of programming languages, a family that includes ECMAScript. A string is a sequence of characters wrapped with quotation marks. All characters may be placed within the quotation marks except for the characters that must be escaped: quotation mark, reverse solidus, and control characters.

There are two-character escape sequence representations of some characters.

`\"` represents the quote character.

`\\` represents the reverse solidus character.

`\/` represents the solidus character. This makes it possible to embed JSON in HTML.

`\b` represents the backspace character.

`\f` represents the formfeed character.

`\n` represents the new line or linefeed character.

`\r` represents the carriage return character.

`\t` represents the tab character.

So, for example, a string containing only a single reverse solidus character may be represented as `"\\"`.

Any character may be represented as a hexadecimal number. The meaning of such a number is determined by ISO/IEC 10646. If the character is in the Basic Multilingual Plane (U+0000 through U+FFFF), then it may be represented as a six-character sequence: a reverse solidus, followed by the lowercase letter `u`, followed by four hexadecimal digits that encode the character's Unicode code point. The hexadecimal letters `A` through `F` can be upper or lowercase. So, for example, a string containing only a single reverse solidus character may be represented as `"\u005C"`.

The following four cases all produce the same result:

`"\u002F"`

`"\u002f"`

`"\"`

`/"`

To escape an extended character that is not in the Basic Multilingual Plane, the character is represented as a twelve-character sequence, encoding the UTF-16 surrogate pair. So for example, a string containing only the G clef character (U+1D11E) may be represented as `"\uD834\uDD1E"`.



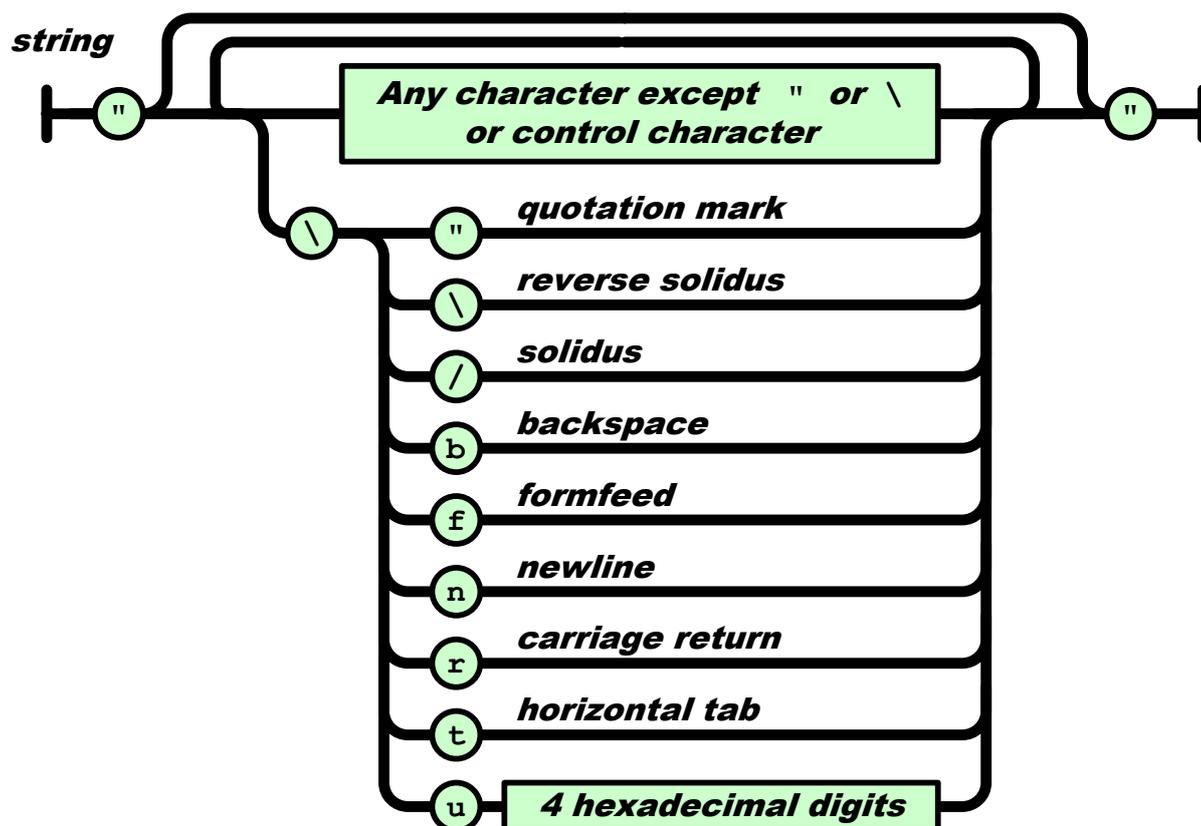


Figure 5 — string

## Annex A (normative)

### JSON Value Grammar

Meaningless whitespace may be inserted before or after any of these values to improve human readability.

*value*

*object*

*array*

*number*

*string*

**true**

**false**

**null**

## Annex B (normative)

### JSON Object Grammar

Meaningless whitespace may be inserted before or after a *string* in a *pair* to improve human readability.

*object*

{ }

{ *members* }

*members*

*pair*

*pair* , *members*

*pair*

*string* : *value*

## Annex C (normative)

### JSON Array Grammar

*array*

[ ]

[ *elements* ]

*elements*

*value*

*value* , *elements*

## Annex D (normative)

### JSON Number Grammar

Whitespace may not be inserted into a number.

*number*

*int*

*int frac*

*int exp*

*int frac exp*

*int*

*digit*

*digit1-9 digits*

*- digit*

*- digit1-9 digits*

*frac*

*. digits*

*exp*

*es digits*

*es*

*e*

*e+*

*e-*

*E*

*E+*

*E-*



*digits*

*digit*

*digit digits*

*digit1-9*

*1*

*2*

*3*

*4*

*5*

*6*

*7*

*8*

*9*

*digit*

*0*

*digit1-9*

## Annex E (normative)

### JSON String Grammar

Strings may not contain control characters. Spaces within a string are literal.

*string*

" "

" *characters* "

*characters*

*character*

*character characters*

*character*

*any-character-except-"-or-\-or-control-character*

*\"*

*\\*

*\/*

*\b*

*\f*

*\n*

*\r*

*\t*

*\u hex hex hex hex*

*hex*

*digit*

*a*

*b*

*c*



d

e

f

A

B

C

D

E

F